

Features

- Excellent space utilization
- Draining and other designs prevent deforming and fracturing due to freezing or other forces.
- Excellent low irradiance power generation
In morning, evening and rainy days, average conversion efficiency up to 96.5% under STC
- Power categorization watt per pallet thus minimizing workload of classification at worksite
- Output Power Tolerance 0~+5Wp

Warranty


12 years Product Material Workmanship

25 years Linear Performance Warranty

Electrical Characteristics

Maximum Power at STC (Pmax) (W)	320	325	330	335
Optimum Operating Voltage (Vmp)(V)	37.69	37.92	38.04	38.4
Optimum Operating Current (Imp) (A)	8.49	8.57	8.69	8.73
Open Circuit Voltage (Voc±5%) (V)	46.76	46.96	47.06	47.59
Short Circuit Current (Isc±5%) (A)	9.00	9.07	9.1	9.13
Module Efficiency (%)	16.49%	16.75%	17.01%	17.26%
Operating Temperature (°C)	-40~85°C			
Nominal Operating Cell Temperature (NOCT)	45±2°C			
Maximum System Voltage (V)	1500V DC			
Maximum Series Fuse Rating (A)	15A			
Module Fire Safety Class	Class C			
Power Production Tolerance	±3%			

STC: Irradiance of 1000 W/m², AM=1.5, module temperature of 25 °C

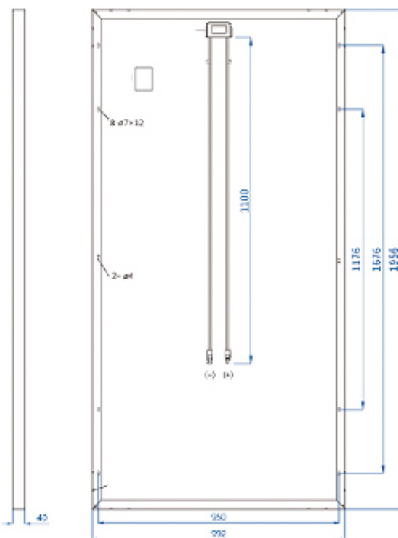


Side view

Rear view

Mechanical Characteristics

Cell Type	Polycrystalline 156.75×78.375mm
Number of cells	72(6×12)
Dimensions	1956×992×40mm
Weight	22kg
Front Glass	3.2mm, Tempered Glass, Low Iron
Frame Material	Anodized Aluminium Alloy
Junction Box	IP67, 3 Diodes
Connector	PV-ZH202B

I-V Curve (JY325P6-Aa-5)

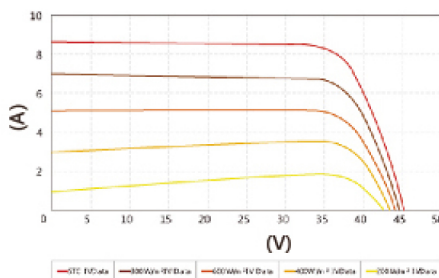

Packaging Configuration

Container	40'HQ
Piece per Pallet	26
Pallet per Container	22
Piece per Container	572

* Manufactured in China